

SMART WIND




- Baking chamber with convection heating
- Outside panels in st/st
- Computer Hybrid Control 5"
- Weekly automatic start
- Electric board removable from the front for easy maintenance
- Water drain system in the floor
- Steam generator with water nebulization
- Mass steam generator (optional)
- Chamber provided with 2 halogen lamps for complete visibility of the product
- Steam automatic exhaust valve for fast steam exhaust (Fast Air)
- Door with double glass low emitting type
- Possibility of symmetric oven (standard hinges left side - handle and electric board right side),
- Automatic self-cleaning (optional)


- PROOF-BOX:
 - Heating regulation and control
 - Humidity regulation and control with probe
 - Internal ventilation for better moisture distribution
 - Anti-flooding solenoid valve
 - Digital keyboard

POWER INLET	400/3N~/50 OVEN 230/1~/50 CELL
WATER INLET	Diam 3/4" (OVEN) Diam 3/8" (PROOF-BOX)
STEAM EXHAUST	Diam 80 mm


WIND 4060/5

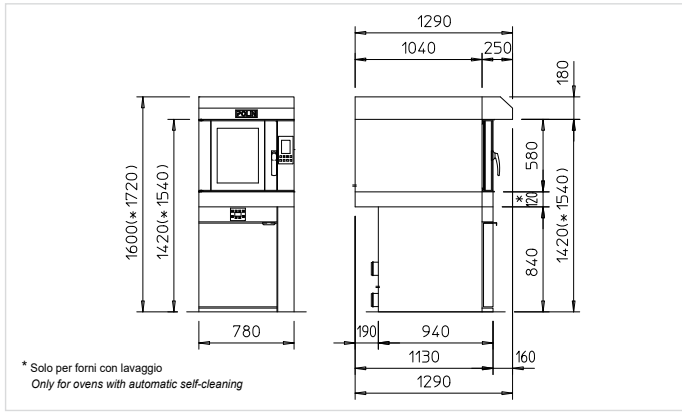


WIND 4080/5

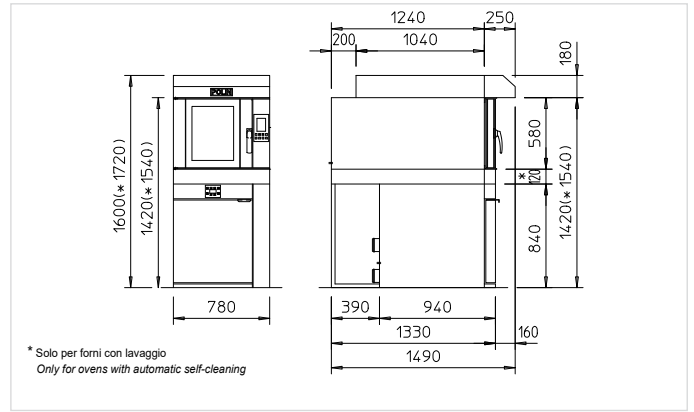

WIND 4060/9-10

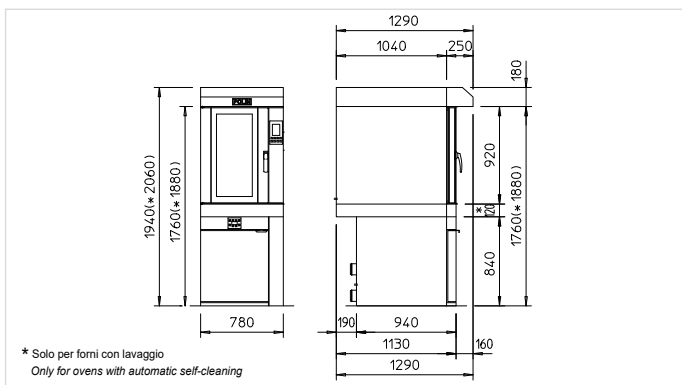

WIND 4080/9-10

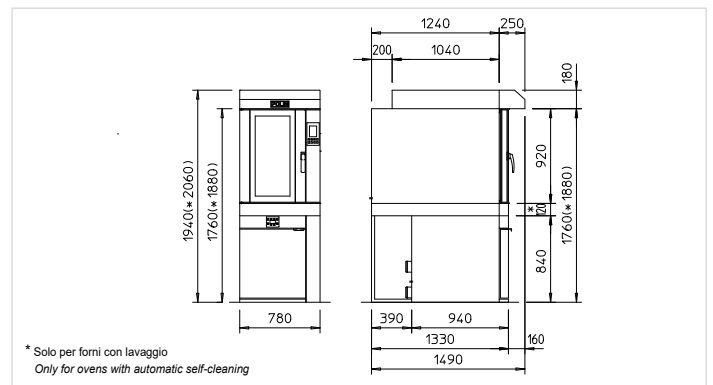

Type	Pan capacity		Pan size	Minimun door width	Weight	Electrical power	Line feeder	Water Inlet	Steam exhaust
	N°	Pitch mm	mm	mm	kg	kW	V/~ /Hz	Ø mm	Ø mm
OVEN 4060/5	5	84	400x600	590	130	6,5	400/3N~/50	3/4"	80
PROOF-BOX	10	64	400x600	790	90	1,7	230/1~/50	3/8"	-
OVEN 4080/5	5	84	400x800	590	150	8,5	400/3N~/50	3/4"	80
PROOF-BOX	10	64	400x800	790	90	1,7	230/1~/50	3/8"	-
OVEN 4060/9-10	9	84	400x600	790	180	13	400/3N~/50	3/4"	80
	10	76							
PROOF-BOX	10	64	400x600	790	90	1,7	230/1~/50	3/8"	-
OVEN 4080/9-10	9	84	400x800	790	200	17	400/3N~/50	3/4"	80
	10	76							
PROOF-BOX	10	64	400x800	790	90	1,7	230/1~/50	3/8"	-

(**) Suction 80 mm - Condensing 150 mm




COMBINATION SMART WIND OVEN



Tipo forno Oven type	Capacità padelle Pan capacity		Dimensioni padelle Pan size	Larghezza minima porta locale Minimum door width	Peso Weight	Potenza elettrica Electrical power	Linea di alimentazione Line feeder	Arrivo Acqua Water Inlet	Scarico vapore Steam exhaust
FORNO / OVEN	N°	Passo / Pitch mm	mm	mm	kg	kW	V~/Hz	Ø mm	Ø mm
4060/5 (1)	5	84	400x600	790	450	9,9	400/3N~/50	3/4"	150
4060/5 (2)	5					10,1			

SMART WIND 4060/5+5

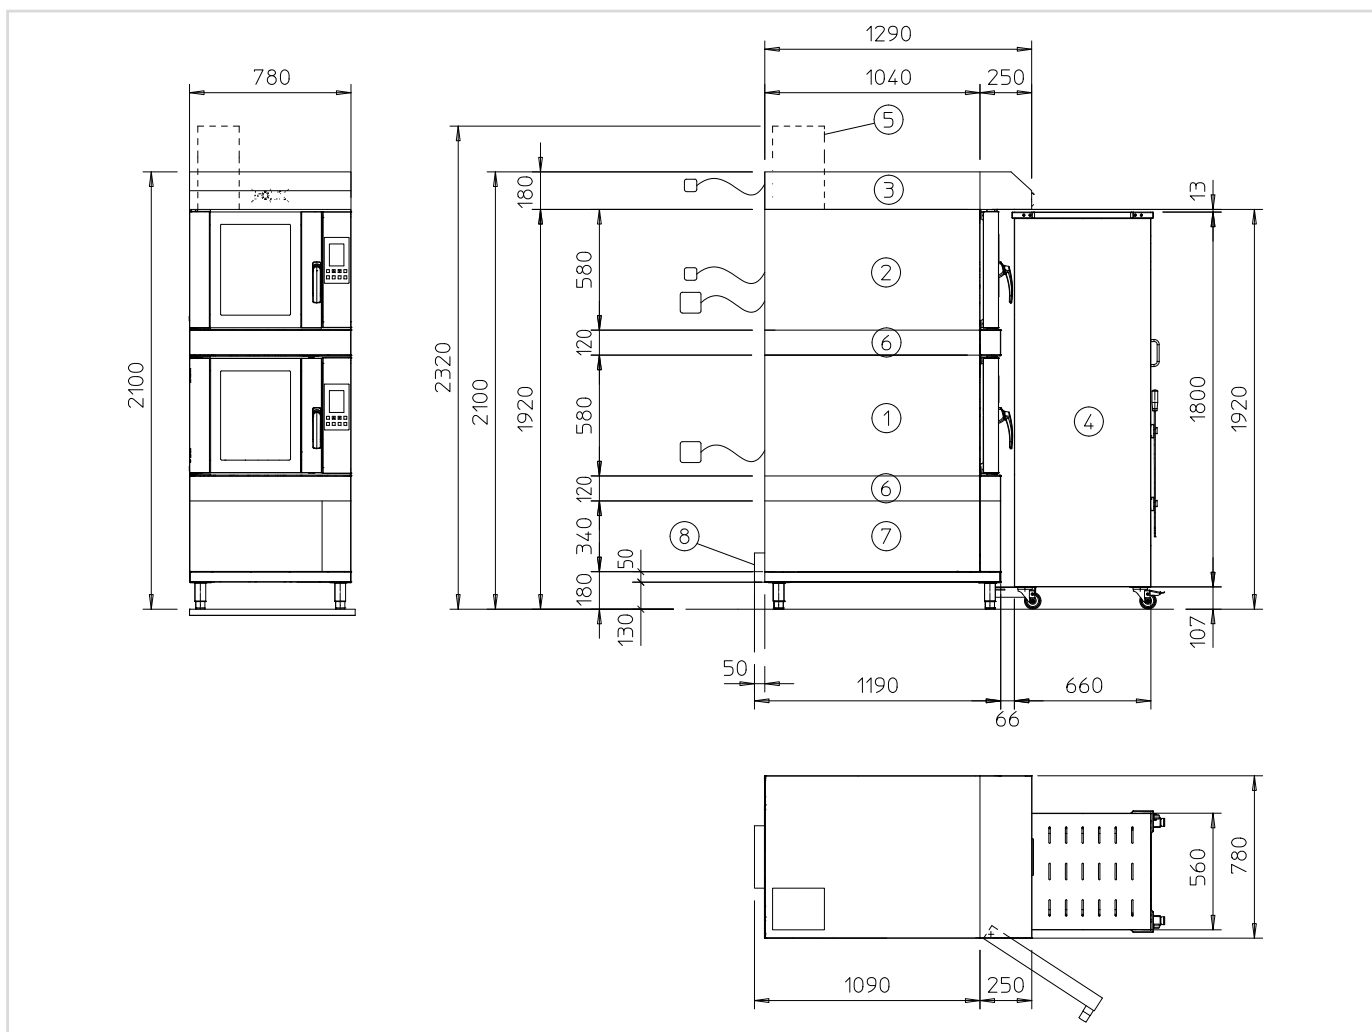

IN ADDITION TO THE STANDARD:

- Computer Hybrid Control 5"
- Ovens suited for oven loading with rack ①②
- Inverter with oversized motors
- Automatic and programmable self-cleaning (optional)
- Mass steam generator (optional)
- Water softener for water treatment included with cleaning (optional) ⑤
- 120 mm high basin under the oven door, in case of washing (optional), for water collection ⑥
- Compartment in the base 340 cm high with pull-out drawer for an easy replacement of the detergent tanks in the presence of washing (optional) ⑦
- Rear drip tray for the collection of water waste and condensation, with a single outlet under the oven so that the oven can be placed as close to a wall as possible ⑧
- Hood with steam aspiration ③
- Oven loader with racks included ④




COMBINATION SMART WIND OVEN



Tipo forno Oven type	Capacità padelle Pan capacity		Dimensioni padelle Pan size	Larghezza minima porta locale Minimun door width	Peso Weight	Potenza elettrica Electrical power	Linea di alimentazione Line feeder	Arrivo Acqua Water Inlet	Scarico vapore Steam exhaust
FORNO / OVEN	N°	Passo / Pitch mm	mm	mm	kg	kW	V/-/Hz	Ø mm	Ø mm
4060/5 (2)	5	84	400x600	790	500	10,1	400/3N~/50	3/4"	150
4060/10 (1)	10	76				16,4			

SMART WIND 4060/5+10

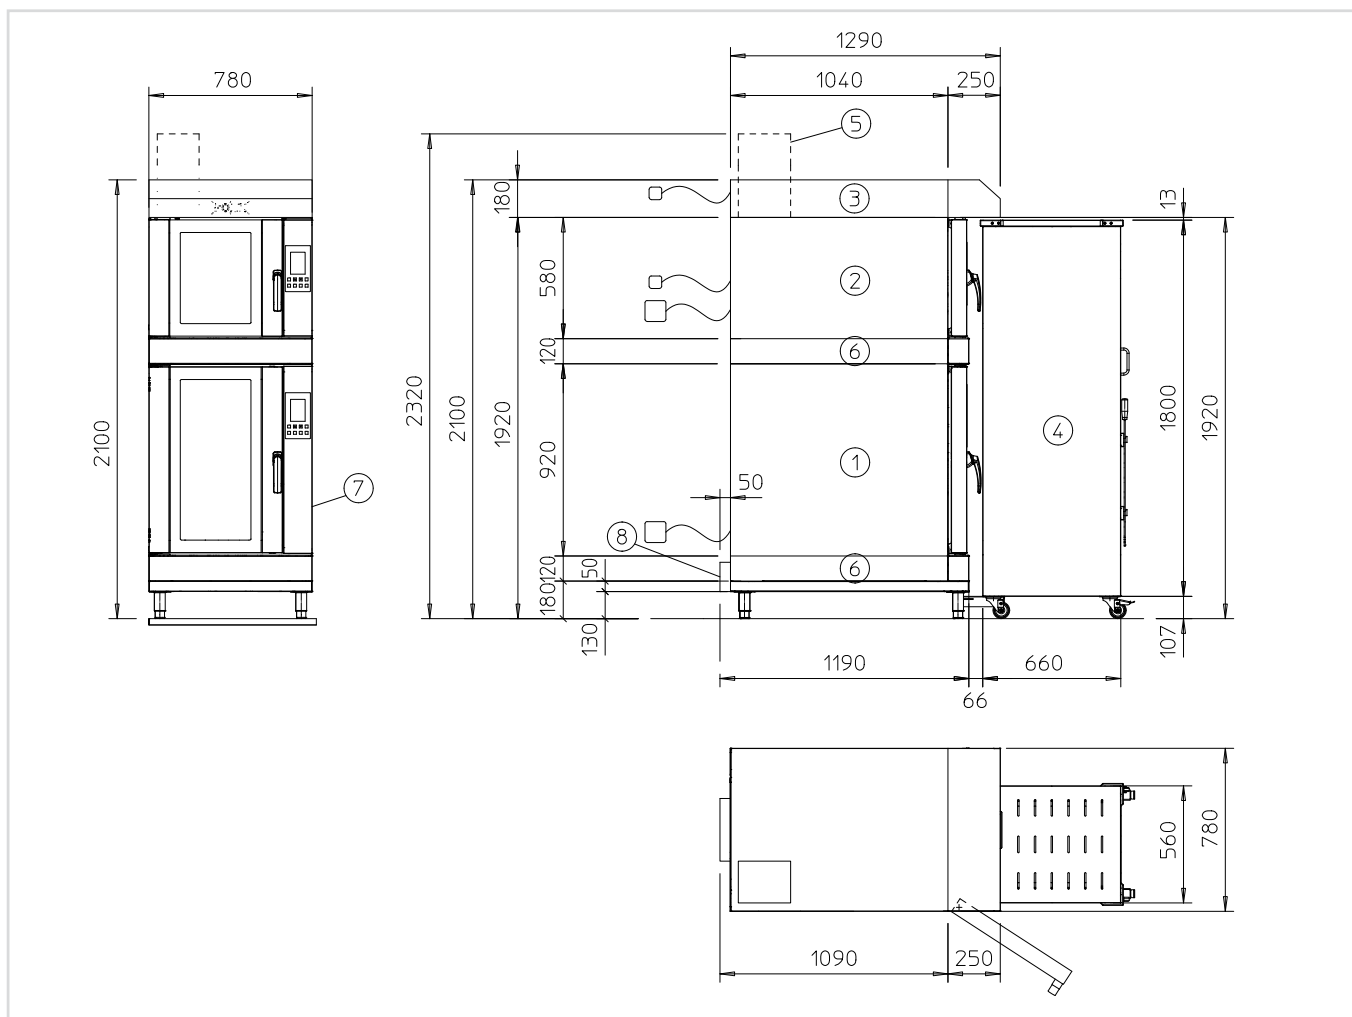

IN ADDITION TO THE STANDARD:

- **Computer Hybrid Control 5"**
- **Ovens suited for oven loading with rack ①②**
- **Inverter with oversized motors**
- **Automatic and programmable self-cleaning (optional)**
- **Mass steam generator (optional)**
- **Water softener for water treatment included with cleaning (optional) ⑤**
- **120 mm high basin under the oven door, in case of washing (optional), for water collection ⑥**
- **Compartment in the oven 4060/10 with pull-out drawer for an easy replacement of the detergent tanks in the presence of washing ⑦**
- **Rear drip tray for the collection of water waste and condensation, with a single outlet under the oven so that the oven can be placed as close to a wall as possible ⑧**
- **Hood with steam aspiration ③**
- **Oven loader with racks included ④**

